KOMBIC 100 DOWNLIGHT

LAMP
Worktitude for light

K11SQ2040OPWB4NWW   **-**   **KOMBIC 100 SQ 1800 IP43 WBN OP WH/WH**

Description:

Finish: Matte white RAL 9010

TECHNICAL SPECIFICATIONS:

R9 :   83

IP
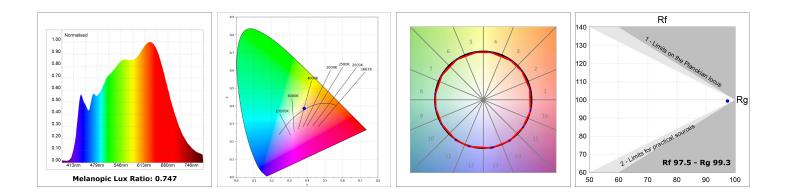20 INT
43 EXT

EPD

CUSTOM MADE OPTIONS:

1-10V   PUSH   TRIAC   ↑lm

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

Data according to regulations 2019/2020/EU and 2019/2015/EU

18-07-2025

Pág.   1 / 2

LAMP
Worktitude for light

K11SQ2040OPWB4NWW   KOMBIC 100 SQ 1800 IP43 WBN OP WH/WH

PHOTOMETRIC DATA :

K11SQ2040OPWB4NWW

η = 100%

Imax = 741 cd/klm

UTE: 1,00B

CIE: 74 92 99 100 100

alpha = 70,3º

BACK   FRONT

50,1 %   50,1 %

Melanopic Lux Ratio: 0.747

Rf

1 - Limits on the Planckian locus

Rg

2 - Limits for practical sources

Rf 97.5 - Rg 99.3

18-07-2025

Data according to regulations 2019/2020/EU and 2019/2015/EU