


KOMBIC 100 DOWNLIGHT



K11SQ2040WFF840NMW



KOMBIC 100 SQ 2000 IP43 NW WFL MA/WH

Description:

Square recessed downlight model KOMBIC 100 SQ by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CR80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate


Weight: 382 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

|               |                             |               |                  |
|---------------|-----------------------------|---------------|------------------|
| Light output: | 1.274 lm                    | °K :          | 4000             |
| Plum:         | 10W                         | CRI :         | 80               |
| Efficacy:     | 127,4 lm/w                  | MacAdam:      | 3                |
| UGR:          | <19                         | Power Supply: | 220-240V 50/60Hz |
| Type:         | COB                         | Gear:         | Electronic       |
| LED Lifetime: | >100.000h L90 B10 (Ta=25°C) |               |                  |
| Power:        | 8,5W                        |               |                  |

Light output tolerance +/- 10%

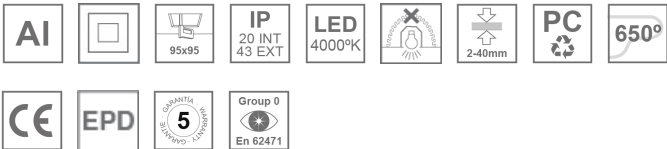

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ2040WF840NMW

KOMBIC 100 SQ 2000 IP43 NW WFL MA/WH

PHOTOMETRIC DATA :

