


KOMBIC 100 DOWNLIGHT

K11SQ2040WF9TWDMW



KOMBIC 100 SQ 2000 IP43 TW WFL DA MA/WH

Description:

Square recessed downlight model KOMBIC 100 SQ by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, with dynamic white colour temperature (2700-6500K) with CRI90. Luminaire with electronic wiring Dali DT8 included. Insolation Class II. Lifetime: 70.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate


Weight: 550 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.747 lm	°K :	2700-6500
Plum:	20W	CRI :	95
Efficacy:	87,4 lm/w	R9 :	91
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	86.000h L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	16,5W		

Light output tolerance +/- 10%

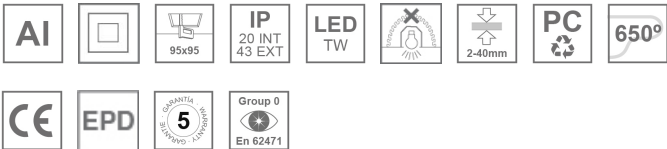

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ2040WF9TWDWMW

KOMBIC 100 SQ 2000 IP43 TW WFL DA MA/WH

PHOTOMETRIC DATA :

