


KOMBIC 100 DOWNLIGHT

K11SQ2043WW927DBB

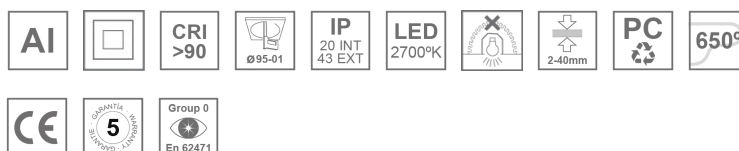
- KOMBIC 100 SQ 2000 IP43 9VWW WW DA BK/BK

**Description:**

LAMP Square recessed downlight KOMBIC 100 SQ 2000 Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Inner reflector finished in Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K and CRI90. Electronic DALI gear included. IP43 rated. Insulation Class II. Photobiological safety group 0. LED life time: 50. 000 L90 B10. Available finishes: White and black. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011**Weight:** 517 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.209 lmw	°K :	2700
Plum:	19,8W	CRI :	90
Efficacy:	61,1 lm/w	R9 :	58
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	19W	Gear:	Adjustable DALI

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11SQ2043WW927DBB

KOMBIC 100 SQ 2000 IP43 9VWW WW DA BK/BK

PHOTOMETRIC DATA :

