

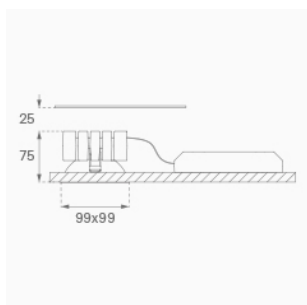
KOMBIC 100 DOWNLIGHT

K11SQ2043WW9TWDMW

- KOMBIC 100 SQ 2000 IP43 TW WW DA MA/WH

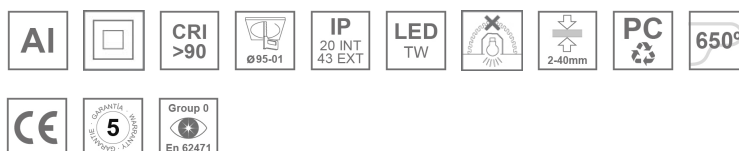


Description:

Finish: metalized polycarbonate mate**Weight:** 517 g**Installation:** Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.296 lmw	°K :	2700-5000
Plum:	20,7W	CRI :	90
Efficacy:	62,6 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ2043WW9TWDMW

KOMBIC 100 SQ 2000 IP43 TW WW DA MA/WH

PHOTOMETRIC DATA :

