


KOMBIC 100 DOWNLIGHT

K11SQ2540WF840DMW




KOMBIC 100 SQ 2500 IP43 NW WFL DA MA/WH

Description:

Square recessed downlight model KOMBIC 100 SQ by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CR80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate**Weight:** 382 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|-----------------------------|----------------------|------------------|
| Light output: | 1.748 lm | °K : | 4000 |
| Plum: | 14W | CRI : | 80 |
| Efficacy: | 124,9 lm/w | MacAdam: | 3 |
| UGR: | <19 | Power Supply: | 220-240V 50/60Hz |
| Type: | COB | Gear: | Adjustable DALI |
| LED Lifetime: | >100.000h L90 B10 (Ta=25°C) | | |
| Power: | 12,2W | | |

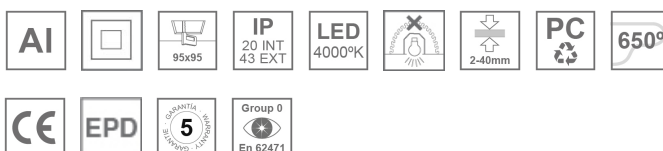Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 DOWNLIGHT

K11SQ2540WF840DMW

KOMBIC 100 SQ 2500 IP43 NW WFL DA MA/WH

PHOTOMETRIC DATA :

