

KOMBIC 100 DOWNLIGHT

K11SQ2543WW830DBB

- KOMBIC 100 SQ 2500 IP43 WW WW DA BK/BK




Description:

Finish: Matte black RAL 9011

Weight: 517 g


Installation: Recessed



TECHNICAL SPECIFICATIONS:

Light output:	1.555 lm	°K :	3000
Plum:	19,8W	CRI :	80
Efficacy:	78,5 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		

Light output tolerance +/- 10%

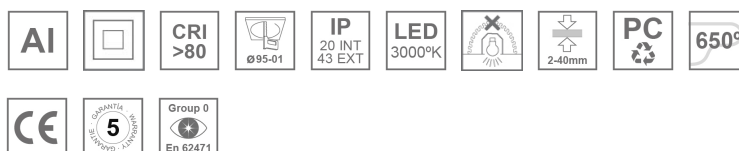

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ2543WW830DBB

KOMBIC 100 SQ 2500 IP43 WW WW DA BK/BK

PHOTOMETRIC DATA :

