KOMBIC 100 DOWNLIGHT

**LAMP**
Worktitude for light

K11SQ2543WW830DBW – **KOMBIC 100 SQ 2500 IP43 WW WW DA BK/WH**

Description:

25
75
99x99

Finish: Matte black RAL 9011

Weight: 517 g

Installation: Recessed
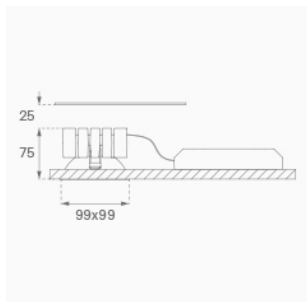
TECHNICAL SPECIFICATIONS:

Light output:	1.555 lm	**ºK :**	3000
Plum:	19,8W	**CRI :**	80
Efficacy:	78,5 lm/w	**MacAdam:**	3
Type:	COB	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25ºC)	**Gear:**	Adjustable DALI
Power:	19W		

Light output tolerance +/- 10%
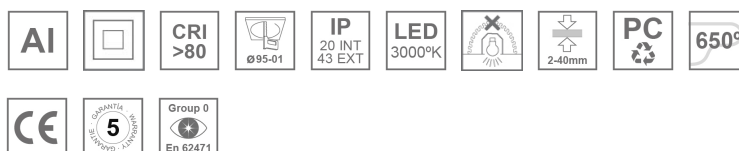
AI	☐	CRI >80	Ø95-01	IP 20 INT 43 EXT	LED 3000ºK	✕	2-40mm	PC ♻	650º

CE	5 GARANTÍA WARRANTY GARANTIE	Group 0 En 62471

CUSTOM MADE OPTIONS:

1-10V	◑	▭	✳ (Bluetooth)	↑lm	LED RETAIL	⊕	PUSH	TRIAC	K

LAMP
Worktitude for light

K11SQ2543WW830DBW   **KOMBIC 100 SQ 2500 IP43 WW WW DA BK/WH**

PHOTOMETRIC DATA :

K11SQ2543WW830DBW

η = 100%

Imax = 1366 cd/klm

UTE: 1,00B

CIE: 79 100 100 100 100

alpha = 55,8º

77,% BACK   FRONT

22,9 %

Tel.   +34937366800

Web   www.lamp.es

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es

15-05-2025

Pág.   2 / 2

Data according to regulations 2019/2020/EU and 2019/2015/EU