


## KOMBIC 100 DOWNLIGHT

K11SQ2543WW830NWW

- KOMBIC 100 SQ 2500 IP43 WW WW WH/WH

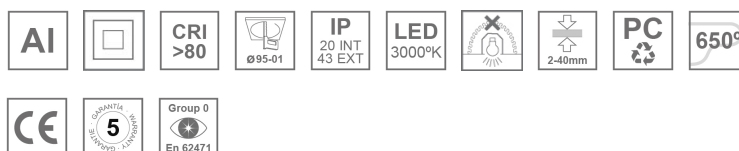


## Description:

**Finish:** Matte white RAL 9010**Weight:** 517 g**Installation:** Recessed

## TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	2.099 lm	<b>°K :</b>	3000
<b>Plum:</b>	19,8W	<b>CRI :</b>	80
<b>Efficacy:</b>	106 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	19W		

*Light output tolerance +/- 10%*

## CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ2543WW830NWW

KOMBIC 100 SQ 2500 IP43 WW WW WH/WH

PHOTOMETRIC DATA :

