

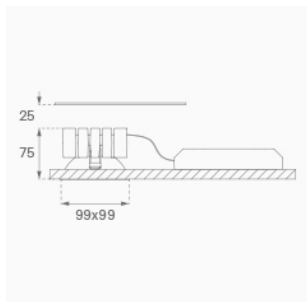
KOMBIC 100 DOWNLIGHT

K11SQ2543WW840DMW

- KOMBIC 100 SQ 2500 IP43 NW WW DA MA/WH

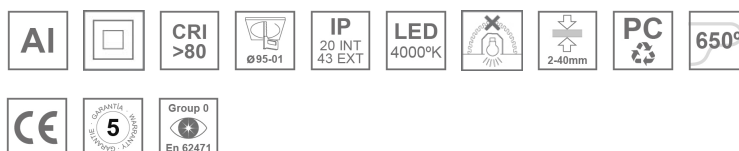


Description:

Finish: metalized polycarbonate mate**Weight:** 517 g**Installation:** Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.203 lm	°K :	4000
Plum:	19,8W	CRI :	80
Efficacy:	111,3 lm/w	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L70 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	19W		

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:



KOMBIC 100 DOWNLIGHT

K11SQ2543WW840DMW

KOMBIC 100 SQ 2500 IP43 NW WW DA MA/WH

PHOTOMETRIC DATA :

