KOMBIC 100 SUT

K11ST1523RF940NWB

- KOMBIC 100 SUT 1500 IP23 9NW RF FL WH/BK

Description:

Finish: Matte white RAL 9010 Weight: 502 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.474 lm	⁰K :	4000
Plum:	14,1W	CRI :	90
Efficacy:	104,5 lm/w	R9 :	65
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25°C)	Gear:	Electronic
Power:	13W		

Light output tolerance +/- 10%

EPD

CUSTOM MADE OPTIONS:



Worktitude for light


KOMBIC 100 SUT


K11ST1523RF940NWB

KOMBIC 100 SUT 1500 IP23 9NW RF FL WH/BK



PHOTOMETRIC DATA :

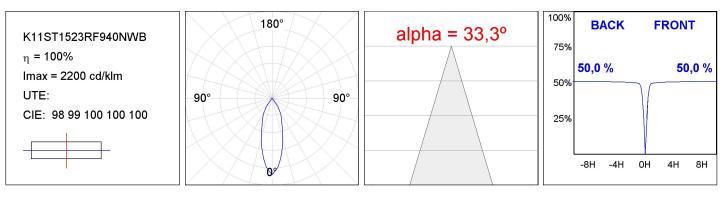

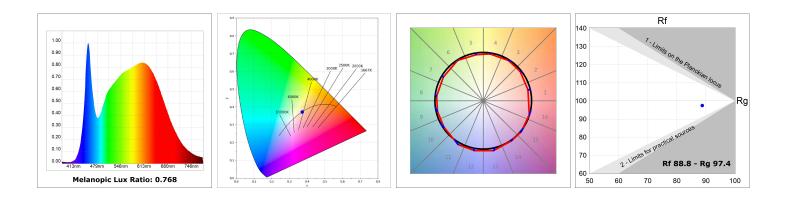

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es