1000

120

Ø100mm

KOMBIC 100 SUT

K11ST1540WF927NWB

KOMBIC 100 SUT 1500 IP40 9VWW WFL WH/BK.

Description:


Suspended track mounting downlight model KOMBIC 100 SUT by Lamp brand. Body made of black aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring included. Insolation Class I. Lifetime: >100.000 L90 B10. With IP40 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

TECHNICAL SPECIFICATIONS:

Light output:	1.044 lm	°К :	2700
Plum:	10W	CRI :	90
Efficacy:	104,4 lm/w	R9 :	57
UGR:	<19		
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)		
Power:	8,5W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


KOMBIC 100 SUT


K11ST1540WF927NWB

KOMBIC 100 SUT 1500 IP40 9VWW WFL WH/BK.



PHOTOMETRIC DATA :

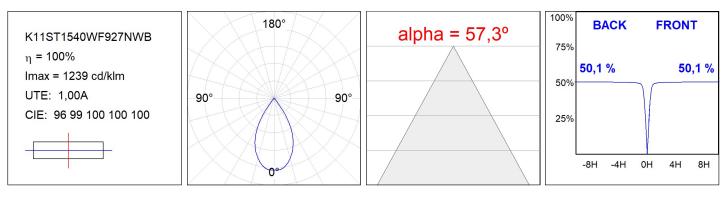

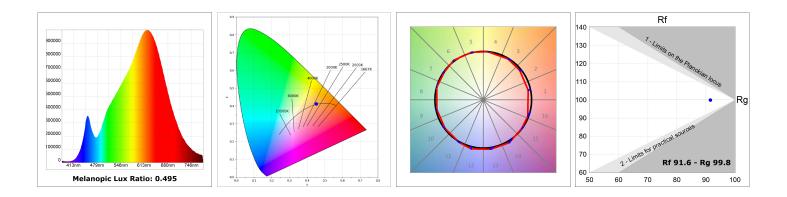

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es