

KOMBIC 100 SUT

K11ST1540WF930NMW



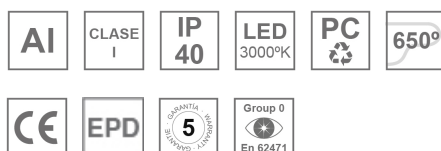
- KOMBIC 100 SUT 1500 IP40 9WW WFL MA/WH.

Description:

Finish: metalized polycarbonate mate

TECHNICAL SPECIFICATIONS:

Light output:	1.088 lm	°K :	3000
Plum:	10W	CRI :	90
Efficacy:	108,8 lm/w	R9 :	66
UGR:	<19		
LED Lifetime:	>100.000h L90 B10 (Ta=25°C)		
Power:	8,5W		

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:



K11ST1540WF930NMW

KOMBIC 100 SUT 1500 IP40 9WW WFL MA/WH.

PHOTOMETRIC DATA :

