


## KOMBIC 100 SUT

K11ST1540WF940NBW




## - KOMBIC 100 SUT 1500 IP40 9NW WFL BK/WH.

**Description:**

Suspended track mounting downlight model KOMBIC 100 SUT by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included Insolation Class I. Lifetime: >100.000 L90 B10. With IP40 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011**TECHNICAL SPECIFICATIONS:**

|                      |                             |              |      |
|----------------------|-----------------------------|--------------|------|
| <b>Light output:</b> | 1.089 lm                    | <b>°K :</b>  | 4000 |
| <b>Plum:</b>         | 10W                         | <b>CRI :</b> | 90   |
| <b>Efficacy:</b>     | 108,9 lm/w                  | <b>R9 :</b>  | 59   |
| <b>UGR:</b>          | <19                         |              |      |
| <b>LED Lifetime:</b> | >100.000h L90 B10 (Ta=25°C) |              |      |
| <b>Power:</b>        | 8,5W                        |              |      |

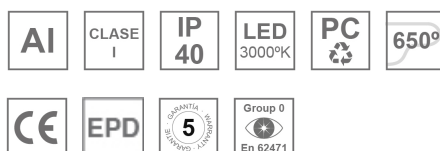**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

K11ST1540WF940NBW

KOMBIC 100 SUT 1500 IP40 9NW WFL BK/WH.

**PHOTOMETRIC DATA :**

