KOMBIC 100 SUT

K11ST2023RF930DMB

Description:

Weight: 712 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.893 lm	⁰K :	3000
Plum:	20W	CRI :	90
Efficacy:	84 lm/w	R9 :	53
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)	Gear:	Adjustable DALI
Power:	13W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:





Product datasheet


KOMBIC 100 SUT


K11ST2023RF930DMB

KOM 100 SUT 2000 IP23 9WW RF FL DA MA/B



PHOTOMETRIC DATA :

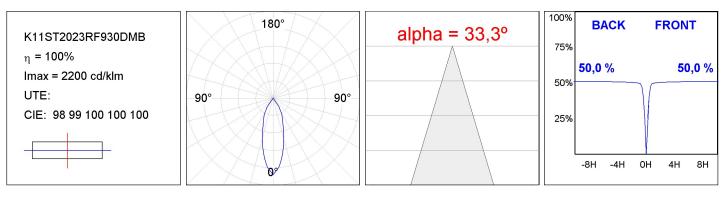

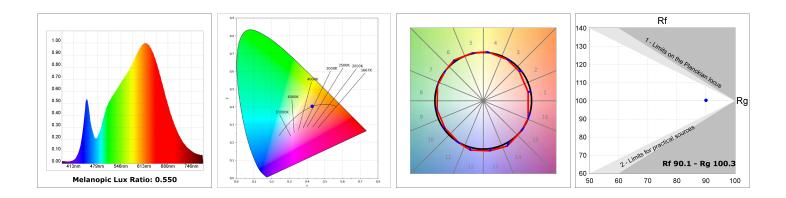

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es