KOMBIC 100 SUT

K11ST2023RF930NMW

- KOMBIC 100 SUT 2000 IP23 9WW RF FL MA/WH

Description:

Finish: metalized polycarbonate mate Weight: 502 g

Installation: Suspended

TECHNICAL SPECIFICATIONS:

Light output:	1.893 lm	⁰К:	3000
Plum:	21,6W	CRI :	90
Efficacy:	82,6 lm/w	R9 :	53
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)	Gear:	Electronic
Power:	13W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:






KOMBIC 100 SUT


K11ST2023RF930NMW

KOMBIC 100 SUT 2000 IP23 9WW RF FL MA/WH



PHOTOMETRIC DATA :

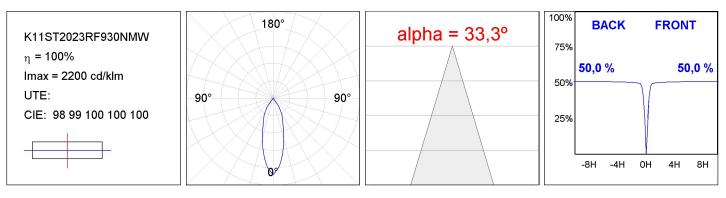

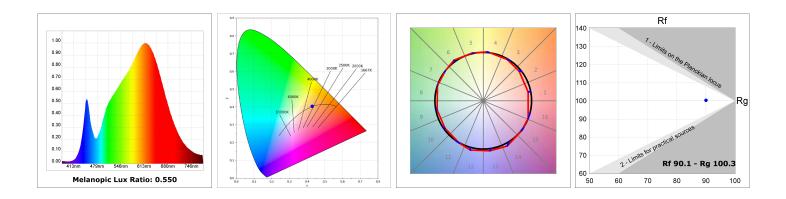

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es