## **KOMBIC 100 SUT**

K11ST2023RF940NMB

#### - KOMBIC 100 SUT 2000 IP23 9NW RF FL MA/BK

**Description:** 

Finish: metalized polycarbonate mate Weight: 502 g

Installation: Suspended

#### **TECHNICAL SPECIFICATIONS:**

| Light output: | 2.019 lm                 | °К:           | 4000             |
|---------------|--------------------------|---------------|------------------|
| Plum:         | 21,6W                    | CRI :         | 90               |
| Efficacy:     | 88,1 lm/w                | R9 :          | 65               |
| UGR:          | <19                      | MacAdam:      | 3                |
| Туре:         | СОВ                      | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L80 B10 (Ta=25⁰C) | Gear:         | Electronic       |
| Power:        | 13W                      |               |                  |

Light output tolerance +/- 10%

EPD




# **KOMBIC 100 SUT**


K11ST2023RF940NMB

KOMBIC 100 SUT 2000 IP23 9NW RF FL MA/BK



### **PHOTOMETRIC DATA :**

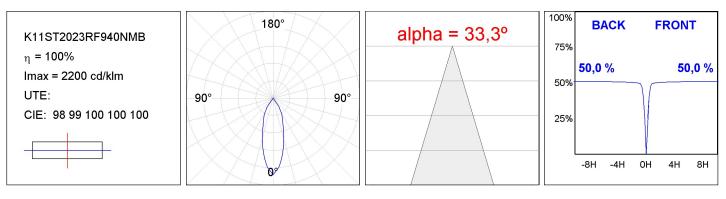

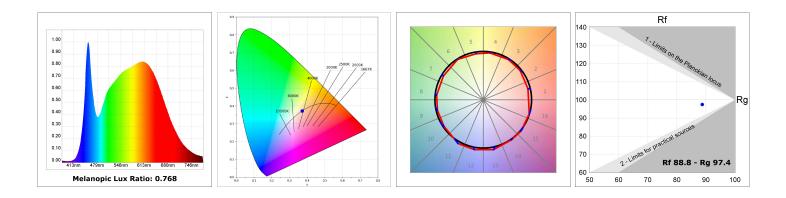

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es