KOMBIC 100 SURFACE TRACK

K11TK1523RF930NMW

- KOMBIC 100 TK 1500 IP23 9WW RF FL MA/WH

Description:

Finish: metalized polycarbonate mate Weight: 502 g

Installation: 3-Circuit track

TECHNICAL SPECIFICATIONS:

Light output:	1.382 lm	°K :	3000
Plum:	14,1W	CRI :	90
Efficacy:	94,1 lm/w	R9 :	53
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25⁰C)	Gear:	Electronic
Power:	13W		

Light output tolerance +/- 10%

EPD




KOMBIC 100 SURFACE TRACK


K11TK1523RF930NMW

KOMBIC 100 TK 1500 IP23 9WW RF FL MA/WH



PHOTOMETRIC DATA :

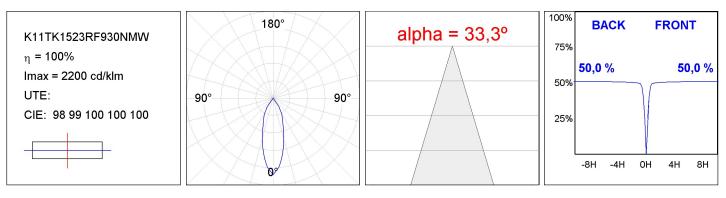

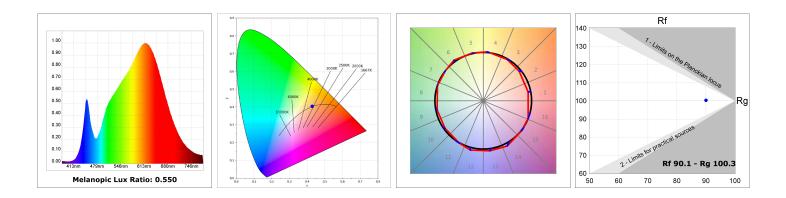

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es