


KOMBIC 100 SURFACE TRACK

K11TK1540WF940NMW

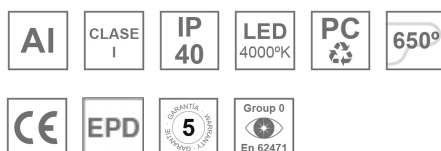
- KOMBIC 100 TK 1500 IP40 9NW WFL MA/WH.

**Description:**

Suspended track mounting downlight model KOMBIC 100 SUT by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included. Insolation Class I. Lifetime: >100.000 L90 B10. With IP40 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate

Installation: 3-Circuit track
TECHNICAL SPECIFICATIONS:

| | | | |
|----------------------|-----------------------------|--------------|------|
| Light output: | 1.124 lm | °K : | 4000 |
| Plum: | 10W | CRI : | 90 |
| Efficacy: | 112,4 lm/w | R9 : | 59 |
| UGR: | <19 | | |
| LED Lifetime: | >100.000h L90 B10 (Ta=25°C) | | |
| Power: | 8,5W | | |

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 100 SURFACE TRACK



K11TK1540WF940NMW

KOMBIC 100 TK 1500 IP40 9NW WFL MA/WH.

PHOTOMETRIC DATA :

