


## KOMBIC 150 DOWNLIGHT

K21RD2023RF830NWW




## KOMBIC 150 RD 2100 IP23 WW RF FL WH/WH

**Description:**

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution and low UGR<19.

**Finish:** Matte white RAL 9010**Weight:** 704 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.792 lm                 | <b>°K :</b>          | 3000             |
| <b>Plum:</b>         | 13,9W                    | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 128,9 lm/w               | <b>MacAdam:</b>      | 3                |
| <b>UGR:</b>          | <19                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>Type:</b>         | COB                      | <b>Gear:</b>         | Electronic       |
| <b>LED Lifetime:</b> | 66.000 L90 B10 (Ta=25°C) |                      |                  |
| <b>Power:</b>        | 12W                      |                      |                  |

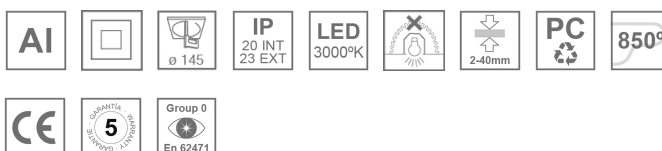**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT

K21RD2023RF830NWW

KOMBIC 150 RD 2100 IP23 WW RF FL WH/WH

PHOTOMETRIC DATA :

