KOMBIC 150 DOWNLIGHT

K21RD2023RF927NMW




KOMBIC 150 RD 2400 IP23 9VWW RF FL MA/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution and low UGR<19.

Finish: metalized polycarbonate mate

Weight: 704 g



Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.945 lm	°K :	2700
Plum:	19,1W	CRI :	90
Efficacy:	101,8 lm/w	R9 :	53
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	66.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	17W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es Worktitude for light


KOMBIC 150 DOWNLIGHT


K21RD2023RF927NMW

KOMBIC 150 RD 2400 IP23 9VWW RF FL MA/WH



PHOTOMETRIC DATA :

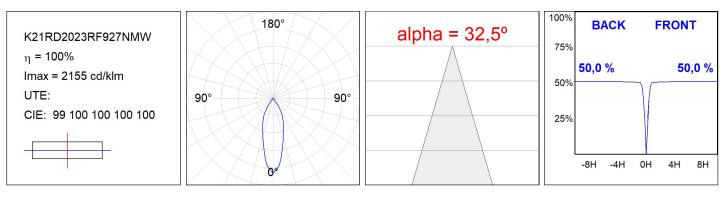

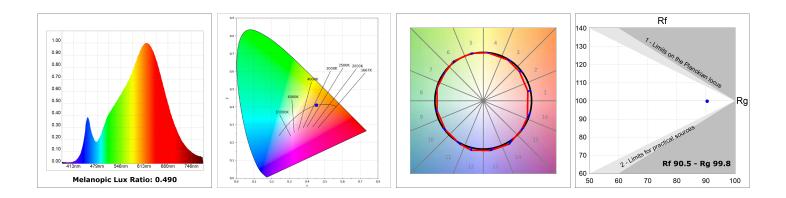

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es