

KOMBIC 150 DOWNLIGHT

K21RD2023RW830NMW




KOMBIC 150 RD 2100 IP23 WW RF WF MA/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.

Finish: metalized polycarbonate mate

Weight: 704 g




Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.854 lm	°K :	3000
Plum:	13,9W	CRI :	80
Efficacy:	133,4 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Electronic
LED Lifetime:	66.000 L90 B10 (Ta=25°C)		
Power:	12W		

Light output tolerance +/- 10%

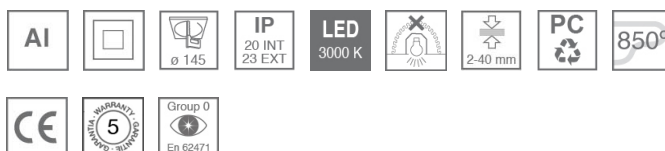

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2023RW830NMW

KOMBIC 150 RD 2100 IP23 WW RF WF MA/WH

PHOTOMETRIC DATA :

K21RD2023RW830NMW
 $\eta = 100\%$
 $I_{max} = 1342 \text{ cd/klm}$
UTE:
CIE: 98 100 100 100 100

