

# KOMBIC 150 DOWNLIGHT

K21RD2023RW927NBW




## KOMBIC 150 RD 2400 IP23 9VWW RF WF BK/WH

### Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.

**Finish:** Matte black RAL 9011

**Weight:** 704 g

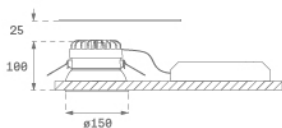


**Installation:** Recessed

### TECHNICAL SPECIFICATIONS:

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 2.002 lm                 | <b>°K :</b>          | 2700             |
| <b>Plum:</b>         | 19,1W                    | <b>CRI :</b>         | 90               |
| <b>Efficacy:</b>     | 104,8 lm/w               | <b>R9 :</b>          | 53               |
| <b>UGR:</b>          | <19                      | <b>MacAdam:</b>      | 3                |
| <b>Type:</b>         | COB                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>LED Lifetime:</b> | 66.000 L90 B10 (Ta=25°C) | <b>Gear:</b>         | Electronic       |
| <b>Power:</b>        | 17W                      |                      |                  |

*Light output tolerance +/- 10%*

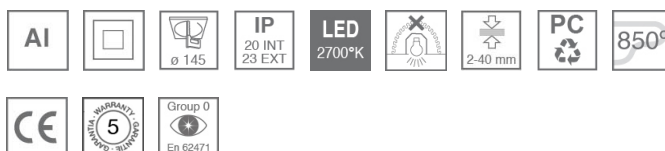

### CUSTOM MADE OPTIONS:



# KOMBIC 150 DOWNLIGHT

K21RD2023RW927NBW

KOMBIC 150 RD 2400 IP23 9VWW RF WF BK/WH

**PHOTOMETRIC DATA :**

K21RD2023RW927NBW  
 $\eta = 100\%$   
 $I_{max} = 1345 \text{ cd/klm}$   
 UTE:  
 CIE: 99 100 100 100 100

