


KOMBIC 150 DOWNLIGHT

K21RD2023RW930DBB

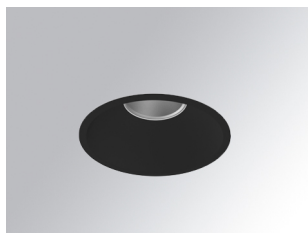


KOMBIC 150 RD 2400 IP23 9WW RF WF DA B/B

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.

Finish: Matte black RAL 9011

Weight: 704 g

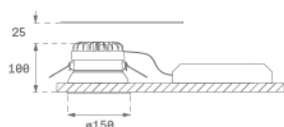


Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.099 lm	°K :	3000
Plum:	19,1W	CRI :	90
Efficacy:	109,9 lm/w	R9 :	54
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	66.000 L90 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	17W		

Light output tolerance +/- 10%

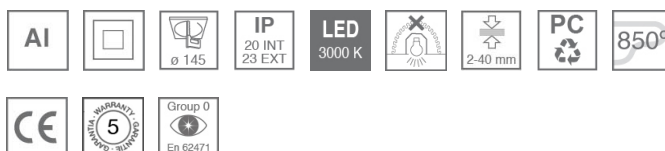

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2023RW930DBB

KOMBIC 150 RD 2400 IP23 9WW RF WF DA B/B

PHOTOMETRIC DATA :

K21RD2023RW930DBB
 $\eta = 100\%$
 $I_{max} = 1345 \text{ cd/klm}$
 UTE:
 CIE: 99 100 100 100 100

