

## KOMBIC 150 DOWNLIGHT

K21RD2023RW940DBB



## KOMBIC 150 RD 2400 IP23 9NW RF WF DA B/B

## Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.

Finish: Matte black RAL 9011

Weight: 704 g




Installation: Recessed

## TECHNICAL SPECIFICATIONS:

|               |                          |               |                  |
|---------------|--------------------------|---------------|------------------|
| Light output: | 2.236 lm                 | °K :          | 4000             |
| Plum:         | 19,1W                    | CRI :         | 90               |
| Efficacy:     | 117,1 lm/w               | R9 :          | 68               |
| UGR:          | <19                      | MacAdam:      | 3                |
| Type:         | COB                      | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 66.000 L90 B10 (Ta=25°C) | Gear:         | Adjustable DALI  |
| Power:        | 17W                      |               |                  |

Light output tolerance +/- 10%

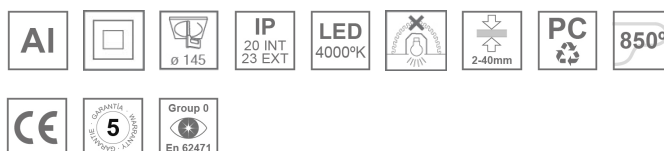

## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2023RW940DBB

KOMBIC 150 RD 2400 IP23 9NW RF WF DA B/B

PHOTOMETRIC DATA :

