KOMBIC 150 DOWNLIGHT

K21RD2023RW940NBW




KOMBIC 150 RD 2400 IP23 9NW RF WF BK/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.

Finish: Matte black RAL 9011

Weight: 704 g



Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.236 lm	°K :	4000
Plum:	19,1W	CRI :	90
Efficacy:	117,1 lm/w	R9 :	68
UGR:	<19	MacAdam:	3
Туре:	СОВ	Power Supply:	220-240V 50/60Hz
LED Lifetime:	66.000 L90 B10 (Ta=25°C)	Gear:	Electronic
Power:	17W		

Light output tolerance +/- 10%



CUSTOM MADE OPTIONS:



Worktitude for light


KOMBIC 150 DOWNLIGHT


K21RD2023RW940NBW

KOMBIC 150 RD 2400 IP23 9NW RF WF BK/WH



PHOTOMETRIC DATA :

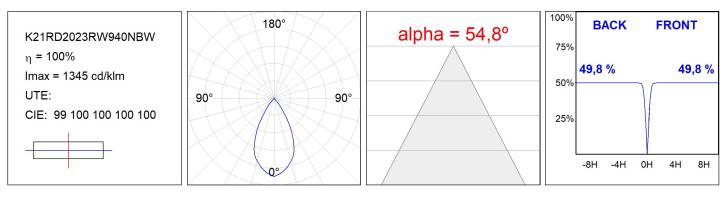

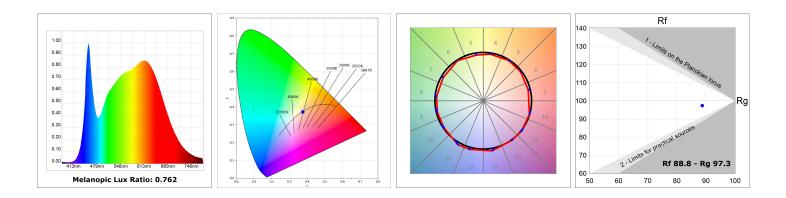

LAMP reserves the right to change the technical specifications of their products. These changes will allow the continual improvement of the products and will also ensure the conformity to current legal changes. Updated information is always available in our website www.lamp.es