

## KOMBIC 150 DOWNLIGHT

K21RD20400P927NWW



## KOMBIC 150 RD 2400 IP43 9VWW OP WH/WH

## Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 2700K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010


Weight: 704 g

Installation: Recessed

## TECHNICAL SPECIFICATIONS:

Light output:	1.640 lm	°K :	2700
Plum:	19,8W		
Efficacy:	82,9 lm/w	R9 :	90
Type:	COB	MacAdam:	3
LED Lifetime:	50.000 L90 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	18W	Gear:	Electronic

Light output tolerance +/- 10%

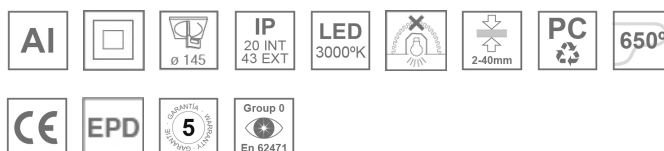

## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD20400P927NWW

KOMBIC 150 RD 2400 IP43 9VWW OP WH/WH

PHOTOMETRIC DATA :

