

# KOMBIC 150 DOWNLIGHT

K21RD20400P940NMW



## KOMBIC 150 RD 2400 IP43 9NW OP MA/WH

### Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** metalized polycarbonate mate

**Weight:** 704 g




**Installation:** Recessed

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	1.797 lm	<b>°K :</b>	4000
<b>Plum:</b>	19,8W	<b>CRI :</b>	90
<b>Efficacy:</b>	90,8 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	18W		

*Light output tolerance +/- 10%*

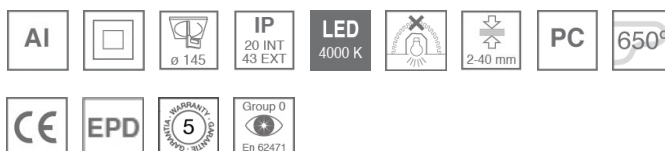

### CUSTOM MADE OPTIONS:



# KOMBIC 150 DOWNLIGHT

K21RD20400P940NMW

KOMBIC 150 RD 2400 IP43 9NW OP MA/WH

**PHOTOMETRIC DATA :**

K21RD20400P940NMW  
 $\eta = 100\%$   
 $I_{max} = 988 \text{ cd/klm}$   
 UTE: 1,00A  
 CIE: 87 100 100 100 100

