

KOMBIC 150 DOWNLIGHT

K21RD20400PWB3DMW




KOMBIC 150 RD 1800 IP43 WBW OP DA MA/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 3000K con CRI95 and Ra greater than 50. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 60.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate

Weight: 704 g

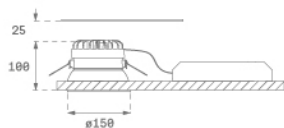


Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.308 lm	°K :	3000
Plum:	19W	CRI :	95
Efficacy:	68,8 lm/w	R9 :	99
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	17,1W		

Light output tolerance +/- 10%

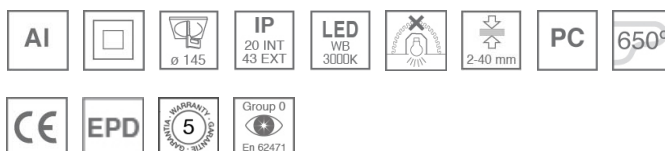

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD20400PWB3DMW

KOMBIC 150 RD 1800 IP43 WBW OP DA MA/WH

PHOTOMETRIC DATA :

K21RD20400PWB3DMW
 $\eta = 100\%$
 $I_{max} = 985 \text{ cd/klm}$
 UTE: 1,00A
 CIE: 86 100 100 100 100

