


KOMBIC 150 DOWNLIGHT

K21RD20400PWB4DWW




KOMBIC 150 RD 1800 IP43 WBN OP DA WH/WH

Description:

Suspended or ceiling mounting downlight model KOMBIC 150 SF by Lamp brand. Body made of white aluminum extrusion with reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. White interior reflector and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature Wellbeing de 4000K con CRI95 and Ra greater than 50. Luminaire with electronic DALI wiring included. Insolation Class I. Lifetime: 60.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 1.478 g**Installation:** Surface**TECHNICAL SPECIFICATIONS:**

Light output:	1.474 lm	°K :	4000
Plum:	19W	CRI :	95
Efficacy:	77,6 lm/w	R9 :	99
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	18W		

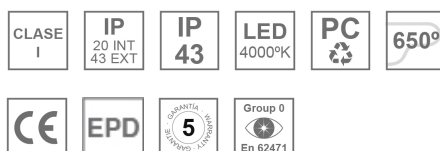Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT

K21RD20400PWB4DWW

KOMBIC 150 RD 1800 IP43 WBN OP DA WH/WH

PHOTOMETRIC DATA :

