

## KOMBIC 150 DOWNLIGHT

K21RD2040WFF830DMW

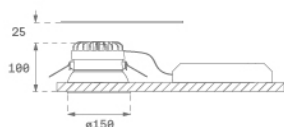


## KOMBIC 150 RD 2100 IP43 WW WFL DA MA/WH

## Description:

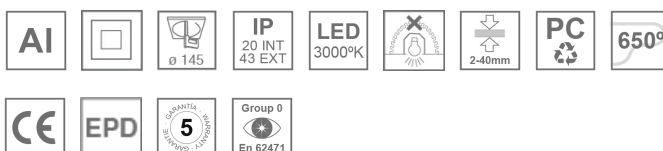
Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CR80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** metalized polycarbonate mate

**Weight:** 704 g

**Installation:** Recessed

## TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	1.282 lm	<b>°K :</b>	3000
<b>Plum:</b>	10W	<b>CRI :</b>	80
<b>Efficacy:</b>	128,2 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	COB	<b>Gear:</b>	Adjustable DALI
<b>LED Lifetime:</b>	>100.000h L90 B10 (Ta=25°C)		
<b>Power:</b>	8,2W		

*Light output tolerance +/- 10%*


## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2040WF830DMW

KOMBIC 150 RD 2100 IP43 WW WFL DA MA/WH

PHOTOMETRIC DATA :

