

## KOMBIC 150 DOWNLIGHT

K21RD2040WF830NBB



## KOMBIC 150 RD 2100 IP43 WW WFL BK/BK

## Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CR80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: >100.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011

Weight: 704 g




Installation: Recessed

## TECHNICAL SPECIFICATIONS:

|               |                             |               |                  |
|---------------|-----------------------------|---------------|------------------|
| Light output: | 1.278 lm                    | °K :          | 3000             |
| Plum:         | 10W                         | CRI :         | 80               |
| Efficacy:     | 127,8 lm/w                  | MacAdam:      | 3                |
| UGR:          | <19                         | Power Supply: | 220-240V 50/60Hz |
| Type:         | COB                         | Gear:         | Electronic       |
| LED Lifetime: | >100.000h L90 B10 (Ta=25°C) |               |                  |
| Power:        | 8,2W                        |               |                  |

Light output tolerance +/- 10%

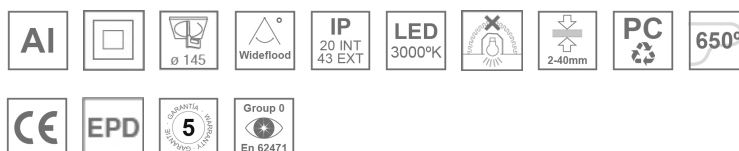

## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2040WF830NBB

KOMBIC 150 RD 2100 IP43 WW WFL BK/BK

PHOTOMETRIC DATA :

