

KOMBIC 150 DOWNLIGHT

K21RD2040WF840DWW



KOMBIC 150 RD 2100 IP43 NW WFL DA WH/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CR80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<16. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Weight: 704 g




Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	1.233 lm	°K :	4000
Plum:	13,7W	CRI :	80
Efficacy:	90 lm/w	MacAdam:	3
UGR:	<16	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	50.000 L90 B10 (Ta=25°C)		
Power:	12W		

Light output tolerance +/- 10%

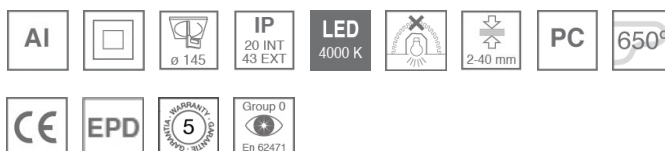

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2040WF840DWW

KOMBIC 150 RD 2100 IP43 NW WFL DA WH/WH

PHOTOMETRIC DATA :

K21RD2040WF840NWW
 $\eta = 100\%$
 $I_{max} = 1140 \text{ cd/klm}$
UTE: 1,00A
CIE: 96 99 100 100 100

