


# KOMBIC 150 DOWNLIGHT

K21RD2040WF930NBB

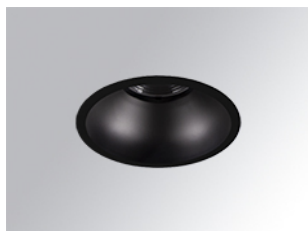


## KOMBIC 150 RD 2400 IP43 9WW WFL BK/BK

### Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CR90. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 50.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011

**Weight:** 704 g

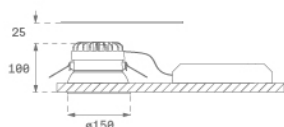


**Installation:** Recessed

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	1.388 lm	<b>°K :</b>	3000
<b>Plum:</b>	19,8W	<b>CRI :</b>	90
<b>Efficacy:</b>	67,6 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	COB	<b>Gear:</b>	Electronic
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)		
<b>Power:</b>	18W		

*Light output tolerance +/- 10%*

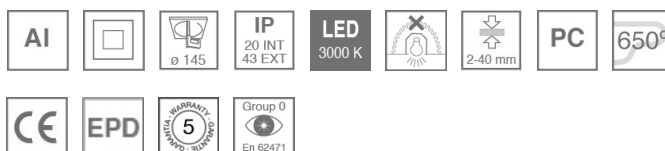

### CUSTOM MADE OPTIONS:



# KOMBIC 150 DOWNLIGHT

K21RD2040WF930NBB

KOMBIC 150 RD 2400 IP43 9WW WFL BK/BK

**PHOTOMETRIC DATA :**

K21RD2040WF930NBB  
 $\eta = 100\%$   
 $I_{max} = 1141 \text{ cd/klm}$   
 UTE:  
 CIE: 98 100 100 100 100

