

## KOMBIC 150 DOWNLIGHT

K21RD2040WW927DBB



## KOMBIC 150 RD 2400 IP43 9VWW WW DA BK/BK

## Description:

LAMP Round recessed downlight KOMBIC 150 RD 2400. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 2700K and CRI90. Electronic DALI gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finishes: White and black. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011

Weight: 725 g




Installation: Recessed

## TECHNICAL SPECIFICATIONS:

Light output:	1.195 lm	°K :	2700
Plum:	19,4W	CRI :	90
Efficacy:	61,6 lm/w	R9 :	61
Type:	COB	MacAdam:	3
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	18W	Gear:	Adjustable DALI

Light output tolerance +/- 10%

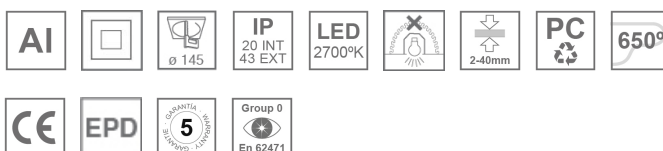

## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2040WW927DBB

KOMBIC 150 RD 2400 IP43 9VWW WW DA BK/BK

PHOTOMETRIC DATA :

