

KOMBIC 150 DOWNLIGHT

K21RD2040WW940NWW




KOMBIC 150 RD 2400 IP43 9NW WW WH/WH

Description:

LAMP Round recessed downlight KOMBIC 150 RD 2400. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K and CRI90. Electronic ON OFF gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finishes: White and black. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Weight: 725 g

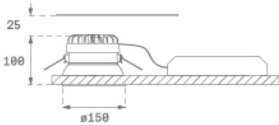


Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|--------------------------|---------------|------------------|
| Light output: | 1.635 lm | °K : | 4000 |
| Plum: | 19,4W | CRI : | 90 |
| Efficacy: | 84,3 lm/w | R9 : | 67 |
| Type: | COB | MacAdam: | 3 |
| LED Lifetime: | 60.000 L80 B10 (Ta=25°C) | Power Supply: | 220-240V 50/60Hz |
| Power: | 18W | Gear: | Electronic |

Light output tolerance +/- 10%

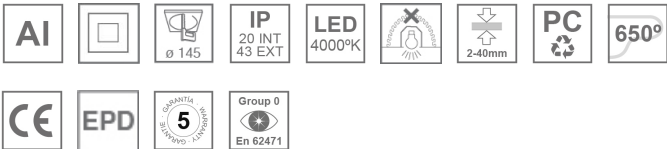

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD2040WW940NWW

KOMBIC 150 RD 2400 IP43 9NW WW WH/WH

PHOTOMETRIC DATA :

