Product datasheet

KOMBIC 150 DOWNLIGHT

K21RD3023RF830NBB



KOMBIC 150 RD 2800 IP23 WW RF FL BK/BK

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution and low UGR<19.



Finish: Matte black RAL 9011

Weight: 704 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.448 lm	**ºK :**	3000
Plum:	19,1W	**CRI :**	80
Efficacy:	128,2 lm/w	**MacAdam:**	3
UGR:	<19	**Power Supply:**	220-240V 50/60Hz
Type:	COB	**Gear:**	Electronic
LED Lifetime:	66.000 L90 B10 (Ta=25ºC)		
Power:	17W		

Light output tolerance +/- 10%

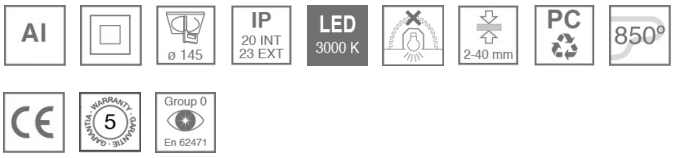

CUSTOM MADE OPTIONS:

KOMBIC 150 DOWNLIGHT

K21RD3023RF830NBB **KOMBIC 150 RD 2800 IP23 WW RF FL BK/BK**
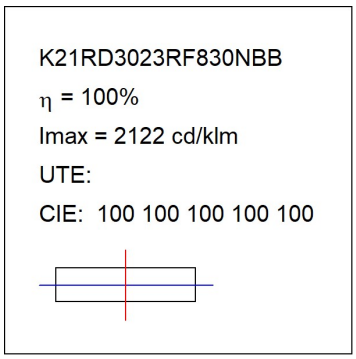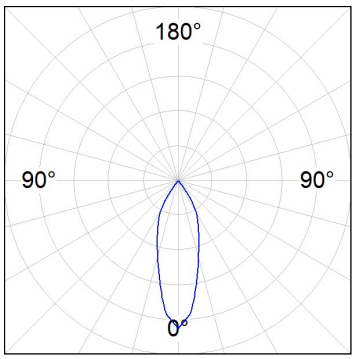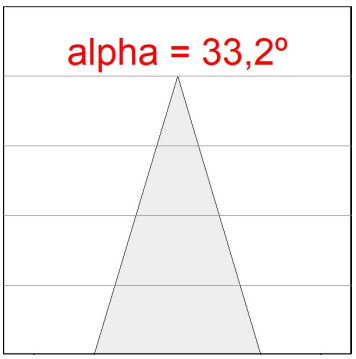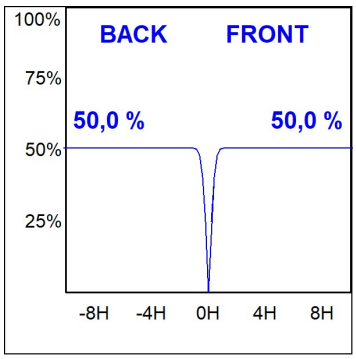
PHOTOMETRIC DATA :