


KOMBIC 150 DOWNLIGHT

K21RD3023RF840DBB

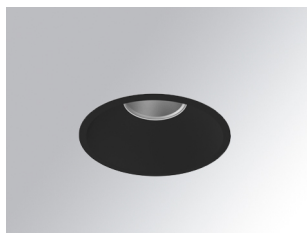


KOMBIC 150 RD 2800 IP23 NW RF FL DA BK/B

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 66.000 L90 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Flood to achieve a controlled light distribution and low UGR<19.

Finish: Matte black RAL 9011

Weight: 704 g




Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.570 lm	°K :	4000
Plum:	19,1W	CRI :	80
Efficacy:	134,6 lm/w	MacAdam:	3
UGR:	<19	Power Supply:	220-240V 50/60Hz
Type:	COB	Gear:	Adjustable DALI
LED Lifetime:	66.000 L90 B10 (Ta=25°C)		
Power:	17W		

Light output tolerance +/- 10%

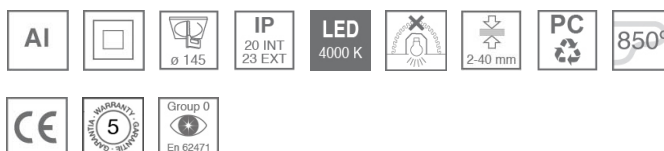

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD3023RF840DBB

KOMBIC 150 RD 2800 IP23 NW RF FL DA BK/B

PHOTOMETRIC DATA :

K21RD3023RF840DBB
 $\eta = 100\%$
 $I_{max} = 2122 \text{ cd/klm}$
UTE:
CIE: 100 100 100 100 100

