

KOMBIC 150 DOWNLIGHT

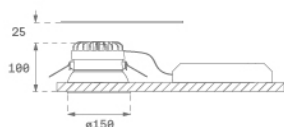
K21RD3023RW940DBB



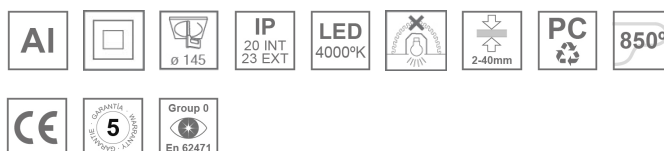
KOMBIC 150 RD 3200 IP23 9NW RF WF DA B/B

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 66.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.

Finish: Matte black RAL 9011**Weight:** 704 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

| | | | |
|----------------------|--------------------------|----------------------|------------------|
| Light output: | 2.944 lm | °K : | 4000 |
| Plum: | 28,3W | CRI : | 90 |
| Efficacy: | 104 lm/w | R9 : | 68 |
| UGR: | <19 | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 66.000 L80 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 25W | | |

Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT

K21RD3023RW940DBB

KOMBIC 150 RD 3200 IP23 9NW RF WF DA B/B

PHOTOMETRIC DATA :

