Product datasheet

KOMBIC 150 DOWNLIGHT

K21RD3023RW940DBB



KOMBIC 150 RD 3200 IP23 9NW RF WF DA B/B

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CRI90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 66.000 L80 B10. With IP23 degree of protection. Group 0 photobiological safety. Reflector aluminium Wide Flood to achieve a controlled light distribution and low UGR<19.



Finish: Matte black RAL 9011

Weight: 704 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.944 lm	**ºK :**	4000
Plum:	28,3W	**CRI :**	90
Efficacy:	104 lm/w	**R9 :**	68
UGR:	<19	**MacAdam:**	3
Type:	COB	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	66.000 L80 B10 (Ta=25ºC)	**Gear:**	Adjustable DALI
Power:	25W		

Light output tolerance +/- 10%

CUSTOM MADE OPTIONS:

Product datasheet

KOMBIC 150 DOWNLIGHT

K21RD3023RW940DBB **KOMBIC 150 RD 3200 IP23 9NW RF WF DA B/B**
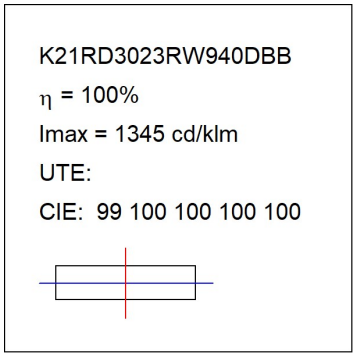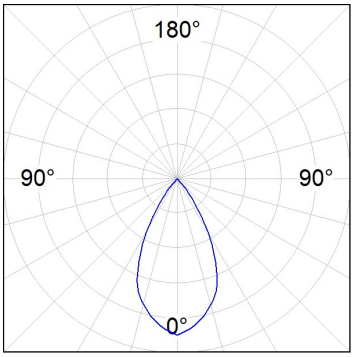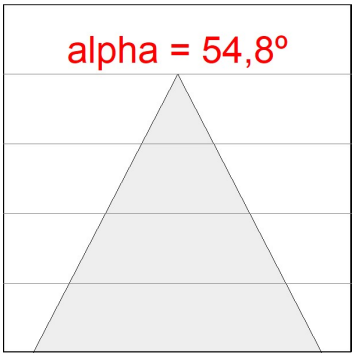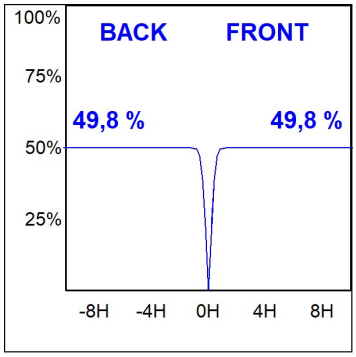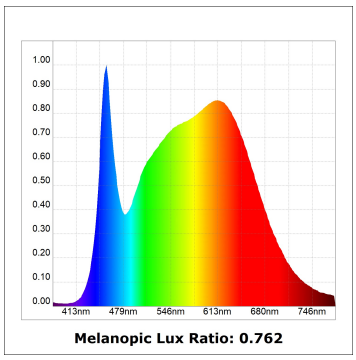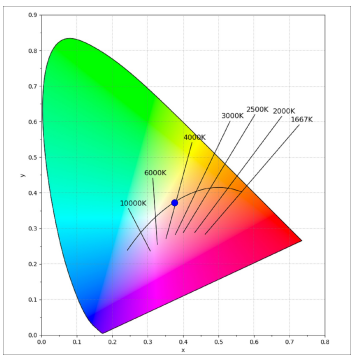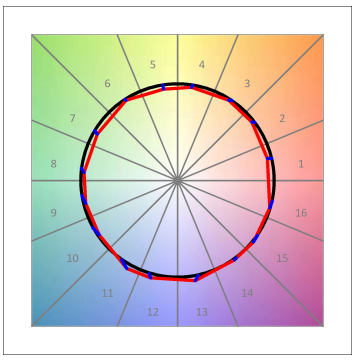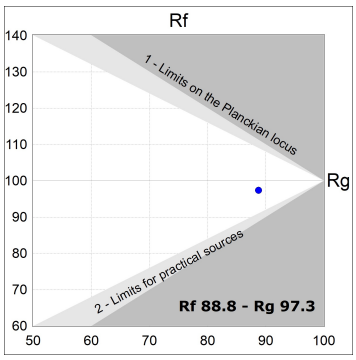
PHOTOMETRIC DATA :