Product datasheet

KOMBIC 150 DOWNLIGHT

K21RD3040OP830DRW

KOMBIC 150 RD 2800 IP43 WW OPAL DA BR/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Shiny metalized interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CRI80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L90 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.



Finish: BRILLIANT METALLIC POLYCARBONATE

Weight: 704 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

Light output:	2.096 lm	**ºK :**	3000
Plum:	19,9W	**CRI :**	80
Efficacy:	105,3 lm/w	**MacAdam:**	3
Type:	COB	**Power Supply:**	220-240V 50/60Hz
LED Lifetime:	50.000 L80 B10 (Ta=25ºC)	**Gear:**	Adjustable DALI
Power:	17.6W		

Light output tolerance +/- 10%

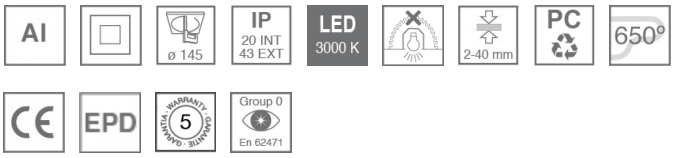

CUSTOM MADE OPTIONS:

KOMBIC 150 DOWNLIGHT

K21RD3040OP830DRW **KOMBIC 150 RD 2800 IP43 WW OPAL DA BR/WH**
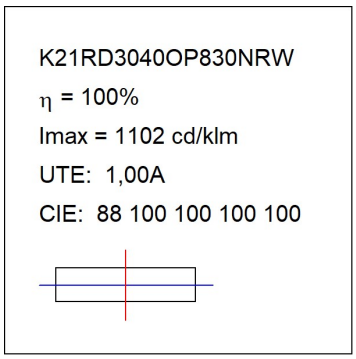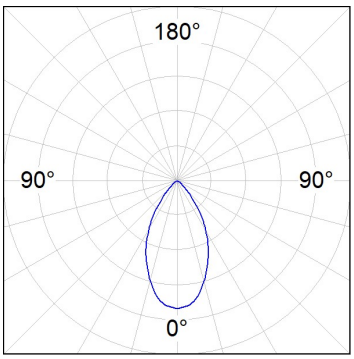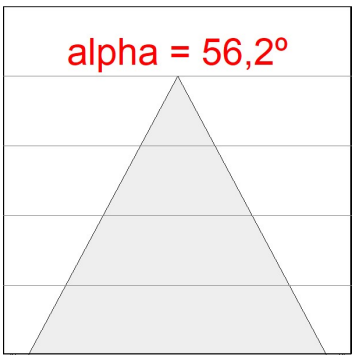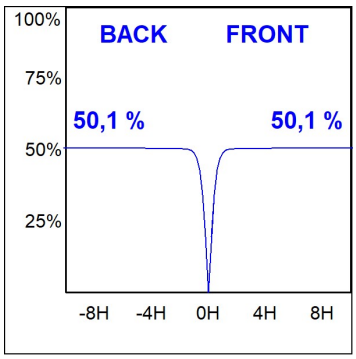
PHOTOMETRIC DATA :