

KOMBIC 150 DOWNLIGHT

K21RD30400P940NWW



KOMBIC 150 RD 3200 IP43 9NW OP WH/WH

Description:

Downlight recessed round model KOMBIC 150 RD 3000 IP40 9NW OP WH/WH Lamp brand. Reflector made of polycarbonate white metallic and frame in white finish and optical film, die cast aluminium heat sink. Model for LED COB with neutral white colour temperature and control gear included. IP43 protection rating. insulation class II Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010


Weight: 704 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|--------------------------|---------------|------------------|
| Light output: | 2.466 lm | °K : | 4000 |
| Plum: | 27,7W | CRI : | 90 |
| Efficacy: | 89 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L70 B10 (Ta=25°C) | Gear: | Electronic |
| Power: | 25W | | |

Light output tolerance +/- 10%

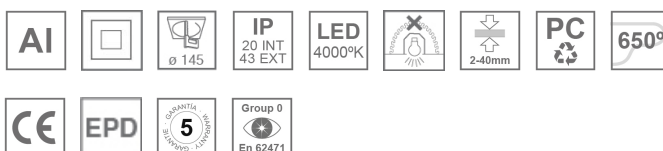

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD30400P940NWW

KOMBIC 150 RD 3200 IP43 9NW OP WH/WH

PHOTOMETRIC DATA :

