

KOMBIC 150 DOWNLIGHT

K21RD30400P9TWDMW




KOMBIC 150 RD 3000 IP43 TW OPAL DA MA/WH

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish and optical film. Heatsink made of die-cast aluminium. COB LED, with dynamic white colour temperature (2700-6500K) with CRI 90. Luminaire with electronic wiring Dali DT8 included. Insolation Class II. Lifetime: 50.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: metalized polycarbonate mate

Weight: 704 g




Installation: Recessed

TECHNICAL SPECIFICATIONS:

| | | | |
|---------------|--------------------------|---------------|------------------|
| Light output: | 1.653 lm | °K : | 2700-6500 |
| Plum: | 23,9W | CRI : | 90 |
| Efficacy: | 69,2 lm/w | MacAdam: | 3 |
| Type: | COB | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 50.000 L80 B10 (Ta=25°C) | Gear: | Adjustable DALI |
| Power: | 20W | | |

Light output tolerance +/- 10%

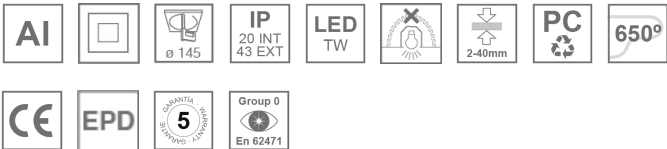

KOMBIC 150 DOWNLIGHT

K21RD30400P9TWDW

KOMBIC 150 RD 3000 IP43 TW OPAL DA MA/WH

PHOTOMETRIC DATA :

