

# KOMBIC 150 DOWNLIGHT

K21RD3040WF840DBW



## KOMBIC 150 RD 2800 IP43 NW WFL DA BK/WH

### Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Black interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CR80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte black RAL 9011

**Weight:** 704 g




**Installation:** Recessed

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	1.680 lm	<b>°K :</b>	4000
<b>Plum:</b>	19,9W	<b>CRI :</b>	80
<b>Efficacy:</b>	84,4 lm/w	<b>MacAdam:</b>	3
<b>UGR:</b>	<19	<b>Power Supply:</b>	220-240V 50/60Hz
<b>Type:</b>	COB	<b>Gear:</b>	Adjustable DALI
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)		
<b>Power:</b>	17.6W		

*Light output tolerance +/- 10%*

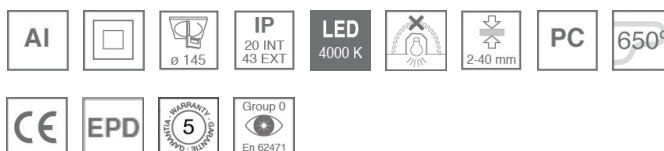

### CUSTOM MADE OPTIONS:



# KOMBIC 150 DOWNLIGHT

K21RD3040WF840DBW

KOMBIC 150 RD 2800 IP43 NW WFL DA BK/WH

## PHOTOMETRIC DATA :

K21RD3040WF840NBW  
 $\eta = 100\%$   
 $I_{max} = 1141 \text{ cd/klm}$   
UTE:  
CIE: 98 100 100 100 100

