

## KOMBIC 150 DOWNLIGHT

K21RD3040WF840DWW



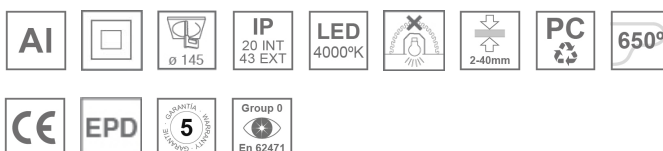
## KOMBIC 150 RD 2800 IP43 NW WFL DA WH/WH

**Description:**

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 4000K with CR80. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** Matte white RAL 9010**Weight:** 704 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

|                      |                          |                      |                  |
|----------------------|--------------------------|----------------------|------------------|
| <b>Light output:</b> | 1.737 lm                 | <b>°K :</b>          | 4000             |
| <b>Plum:</b>         | 19,1W                    | <b>CRI :</b>         | 80               |
| <b>Efficacy:</b>     | 90,9 lm/w                | <b>MacAdam:</b>      | 3                |
| <b>UGR:</b>          | <19                      | <b>Power Supply:</b> | 220-240V 50/60Hz |
| <b>Type:</b>         | COB                      | <b>Gear:</b>         | Adjustable DALI  |
| <b>LED Lifetime:</b> | 50.000 L70 B10 (Ta=25°C) |                      |                  |
| <b>Power:</b>        | 17.6W                    |                      |                  |

**Light output tolerance +/- 10%****CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT

K21RD3040WF840DWW

KOMBIC 150 RD 2800 IP43 NW WFL DA WH/WH

PHOTOMETRIC DATA :

