

## KOMBIC 150 DOWNLIGHT

K21RD3040WF930DWW



## KOMBIC 150 RD 3200 IP43 9WW WFL DA WH/WH

## Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, colour temperature 3000K with CR90. Luminaire with electronic wiring Dali included. Insolation Class II. Lifetime: 50.000 L70 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low UGR<19. Environmental Product Declaration - EPD®available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010

Weight: 704 g




Installation: Recessed

## TECHNICAL SPECIFICATIONS:

Light output:	2.107 lm	°K :	3000
Plum:	19W	CRI :	90
Efficacy:	110,3 lm/w	R9 :	66
UGR:	<19	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	100.000h L90 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	17W		

Light output tolerance +/- 10%

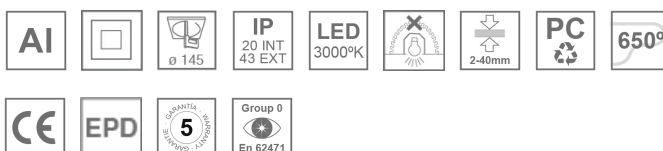

## CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD3040WF930DWW

KOMBIC 150 RD 3200 IP43 9WW WFL DA WH/WH

PHOTOMETRIC DATA :

