

KOMBIC 150 DOWNLIGHT


K21RD3040WF9TWDBB



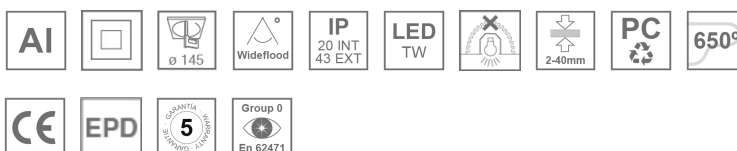
KOMBIC 150 RD 3000 IP43 TW WFL DA BK/BK

Description:

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Interior reflector and frame in black finish. Heatsink made of die-cast aluminium. COB LED, with dynamic white colour temperature (2700-6500K) with CRI90. Luminaire with electronic wiring Dali DT8 included. Insolation Class II. Lifetime: 86.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<16. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011**Weight:** 704 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	1.911 lm	°K :	2700-6500
Plum:	25W	CRI :	95
Efficacy:	76,4 lm/w	R9 :	86
UGR:	<16	MacAdam:	3
Type:	COB	Power Supply:	220-240V 50/60Hz
LED Lifetime:	86.000h L80 B10 (Ta=25°C)	Gear:	Adjustable DALI
Power:	20W		

Light output tolerance +/- 10%

KOMBIC 150 DOWNLIGHT

K21RD3040WF9TWDBB

KOMBIC 150 RD 3000 IP43 TW WFL DA BK/BK

PHOTOMETRIC DATA :

