

## KOMBIC 150 DOWNLIGHT


K21RD3040WF9TWDMW



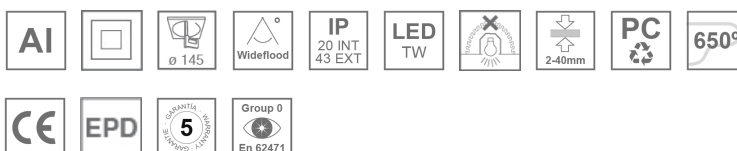
## KOMBIC 150 RD 3000 IP43 TW WFL DA MA/WH

**Description:**

Round recessed downlight model KOMBIC 150 RD by Lamp brand. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Matte metallic interior reflector and frame in white finish. Heatsink made of die-cast aluminium. COB LED, with dynamic white colour temperature (2700-6500K) with CRI90. Luminaire with electronic wiring Dali DT8 included. Insolation Class II. Lifetime: 86.000 L80 B10. With IP43 degree of protection. Group 0 photobiological safety. With Wide Flood optics to achieve a controlled light distribution and low glare level, less than UGR<16. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

**Finish:** metalized polycarbonate mate**Weight:** 704 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

<b>Light output:</b>	1.994 lm	<b>°K :</b>	2700-6500
<b>Plum:</b>	25W	<b>CRI :</b>	95
<b>Efficacy:</b>	79,8 lm/w	<b>R9 :</b>	86
<b>UGR:</b>	<16	<b>MacAdam:</b>	3
<b>Type:</b>	COB	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	86.000h L80 B10 (Ta=25°C)	<b>Gear:</b>	Adjustable DALI
<b>Power:</b>	20W		

**Light output tolerance +/- 10%**

KOMBIC 150 DOWNLIGHT

K21RD3040WF9TWDMW

KOMBIC 150 RD 3000 IP43 TW WFL DA MA/WH

PHOTOMETRIC DATA :

