



KOMBIC 150 DOWNLIGHT

K21RD3040WW840NBB

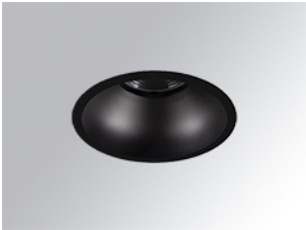

KOMBIC 150 RD 2800 IP43 NW WW BK/BK

Description:

LAMP Round recessed downlight KOMBIC 150 RD 2800. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K and CRI80. Electronic ON OFF gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finishes: White and black. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte black RAL 9011


Weight: 725 g

Installation: Recessed

TECHNICAL SPECIFICATIONS:

|               |                          |               |                  |
|---------------|--------------------------|---------------|------------------|
| Light output: | 1.560 lm                 | °K :          | 4000             |
| Plum:         | 19,4W                    | CRI :         | 80               |
| Efficacy:     | 80,4 lm/w                | MacAdam:      | 3                |
| Type:         | COB                      | Power Supply: | 220-240V 50/60Hz |
| LED Lifetime: | 60.000 L80 B10 (Ta=25°C) | Gear:         | Electronic       |
| Power:        | 17,6W                    |               |                  |

Light output tolerance +/- 10%

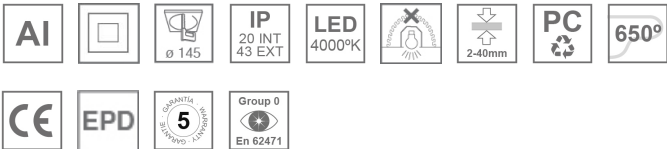

CUSTOM MADE OPTIONS:



KOMBIC 150 DOWNLIGHT

K21RD3040WW840NBB

KOMBIC 150 RD 2800 IP43 NW WW BK/BK

PHOTOMETRIC DATA :

