


KOMBIC 150 DOWNLIGHT

K21RD3040WW940DWW




KOMBIC 150 RD 3400 IP43 9NW WW DA WH/WH

Description:

LAMP Round recessed downlight KOMBIC 150 RD 3400. Reflector made of recycled polycarbonate R-PC FR WHITE TM non-brominated flame retardant additive. Flammability grade V0 according to UL94. Wallwasher optic option, suitable for vertical plane lighting or work areas surroundings. Heatsink made of die-cast aluminium with black finish. COB LED, colour temperature 4000K and CRI90. Electronic DALI gear included. IP44 rated. Insulation Class II. Photobiological safety group 0. LED life time: 60.000 L80 B10. Available finishes: White and black. Environmental Product Declaration - EPD@available, according to UNE-EN ISO 9001:2015 and UNE-EN ISO 14001:2015.

Finish: Matte white RAL 9010**Weight:** 725 g**Installation:** Recessed**TECHNICAL SPECIFICATIONS:**

Light output:	2.155 lm	°K :	4000
Plum:	27,7W	CRI :	90
Efficacy:	77,8 lm/w	R9 :	67
Type:	COB	MacAdam:	3
LED Lifetime:	60.000 L80 B10 (Ta=25°C)	Power Supply:	220-240V 50/60Hz
Power:	25W	Gear:	Adjustable DALI

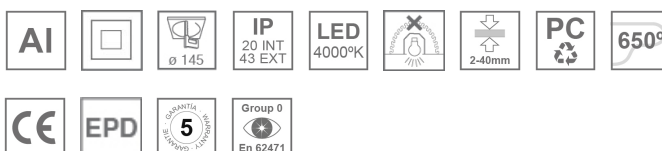Light output tolerance +/- 10%**CUSTOM MADE OPTIONS:**

KOMBIC 150 DOWNLIGHT

K21RD3040WW940DWW

KOMBIC 150 RD 3400 IP43 9NW WW DA WH/WH

PHOTOMETRIC DATA :

